

4-Burner Natural Gas Grill

WARNING

Improper installation, adjustment, alteration, service or maintenance can cause injury or property damage. Read the installation, operation and maintenance instructions thoroughly before installing or servicing this equipment.

DANGER

Failure to follow these instructions could result in a fire or explosion that could cause property damage, personal injury or death.

DANGER

DO NOT use gas grill for indoor cooking or heating. TOXIC fumes can accumulate and cause asphyxiation. DO NOT use in or on boats or recreational vehicles.

PROP 65 WARNING

Chemicals known to the state of California to cause cancer, birth defects or other reproductive harm are created by the combustion of propane.



WARNING

FOR YOUR SAFETY :

**For Outdoor Use Only
(outside any enclosure)**



SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE. IF YOU ARE ASSEMBLING THIS UNIT FOR SOMEONE ELSE, GIVE THIS MANUAL TO HIM OR HER TO SAVE FOR FUTURE REFERENCE. FOR CUSTOMER SERVICE, EMAIL TO SERVICE@BBQTEK.COM OR CALL 1-888- 571- 6888 (TOLL-FREE), 6 A.M. – 5 P.M.(PST), MONDAY-FRIDAY.



Grill Operation 1-2-3

Before Grilling.

- Step 1 Keep your grill a safe distance away from your property.*
- Step 2 Always Perform a Leak Test. *
- Step 3 Keep children away from the grill.

During Grilling.

(To avoid tripping safety valves, please follow these instructions carefully!)

- Step 1 First open lid and turn gas tank on slowly.
- Step 2 Turn only one knob on at a time when lighting up the grill.
- Step 3 Use protective gloves when grill gets hot.

After Grilling.

- Step 1 Burn grill for 10-15 minutes to burn off food residues.
- Step 2 Wait until the grill is completely cooled before closing lid.
- Step 3 Clean up grease build-up and cover your grill.

* Please refer to the owner's manual for details.

WARNING

1. DO not store or use gasoline or other flammable liquids or vapor in the vicinity within 25 feet of this or any other appliance.
2. When cooking with oil/grease, do not allow the oil/grease to exceed 350°F.
3. Do not store or use extra cooking oil in the vicinity of this or any other appliance.

DANGER

If you smell gas:

1. Shut off gas to the appliance.
2. Extinguish any open flame.
3. Open lid.
4. If odor continues, keep away from the appliance and immediately call your gas supplier or your fire department.

Always read and understand the **WARNINGS** and **INSTRUCTIONS** that are contained in this manual before attempting to use this gas barbecue grill, to prevent possible bodily injury or property damage.

Always keep this manual for convenient future reference.

Table of Contents

For Your Safety.....	3
Illustrated Parts List	5
Hardware List.....	6
Assembly Instructions.....	7
Operating Your Grill.....	14
Natural gas connection.....	14
Checking for Leaks.....	15
Lighting Your Grill.....	15
Excess flow safety valve reset procedure.....	17
Care and Maintenance.....	18
Award-Winning Barbecue Recipes.....	19
Troubleshooting.....	20
Warranty Program.....	22

For Your Safety

Dear Valued Customer,

Congratulations on your new barbecue grill purchase! You've made the right choice. In this manual, you will find assembly instructions, suggestions for grilling and helpful hints, as well as guidelines for the safe operation, proper care and use of your grill. Our expert staff strives to provide you with an easy to assemble product. Should you have any questions or problems with this product, please call our customer service department at 1-888-571-6888 6:00 am - 5:00 pm (PST), Monday through Friday.

NOTE: The use and installation of this product must conform to local codes. In the absence of local codes, use the National Fuel Gas Code, ANSI Z223.1/ NFPA54. Reference to Natural Gas and Propane Installation code CSA B149.1 or Propane Storage and Handling code B149.2

IMPORTANT NOTICE: READ ALL INSTRUCTIONS PRIOR TO ASSEMBLY AND USE

Safety First!

Read and understand all warnings and precautions prior to operating your grill.

WARNING

1. This grill is for outside use only. It should not be used in a building, garage or any other enclosed area.
2. The use of alcohol, prescription or non-prescription drugs may impair an individual's ability to properly assemble or safely operate this appliance.
3. Always open the grill lid carefully and slowly as heat and steam trapped within the grill could cause severe burns.
4. Always place your grill on a hard and level surface far away from combustible materials and structures. An asphalt or blacktop surface may not be acceptable for this purpose.
5. Do not leave a lit grill unattended.
6. Keep children and pets away from the grill at all times.
7. This is not a tabletop grill. Do not place this grill on any type of tabletop surface.
8. Do not use the grill in high winds.
9. This grill must be used with natural gas only (natural gas hose included).
10. Do not attempt to attach this grill to the self-contained propane system of a camper, trailer, motor home or house.
11. Do not use charcoal or lighter fluid.
12. This outdoor gas appliance is not intended to be installed in or on recreation vehicles and/or boats.
13. Do not attempt to move the grill while it is lit.
14. Do not use the grill unless it is **COMPLETELY** assembled and all parts are securely fastened and tightened.
15. Keep combustible items and surfaces at least 24 inches away from the grill at all times. DO NOT use this gas grill or any gas product under any overhead enclosure or near any unprotected combustible constructions.
16. Do not use in an explosive atmosphere. Keep grill area clear and free from combustible materials, gasoline and other flammable vapors and liquids.
17. Do not attempt to use or assemble with missing or damaged parts. Contact customer service for a replacement.

CAUTION-Prevention of Burns

1. To avoid burns, do not touch metal parts of the grill until they have completely cooled for at least 45 minutes or unless you are wearing protective gear such as pot holders, protective gloves or mittens.
2. Do not alter the grill in any manner.
3. Clean and inspect the hose before each use. If there is evidence of abrasion, wear, cuts or leaks, the hose must be replaced prior to operation. The replacement hose assembly should be in accordance with the manufacturer's specifications.
4. Move gas hoses as far away as possible from hot surfaces and dripping hot grease.
5. Never keep a filled gas container in a hot car or car trunk. Heat will cause the gas pressure to increase, which could open the relief valve and allow gas to escape.

Safe Locations For Use Of This Outdoor Grill

DANGER

Never use this outdoor grill inside any building, garage, shed or breezeway, or inside any boat, trailer or recreational vehicle, to prevent a possible fire and to prevent the possibility of carbon monoxide poisoning or asphyxiation.


WARNINGS

Do not use this appliance under overhead combustible surface or covered area (e.g., awnings, umbrellas, porches or gazeboes).

Always confirm that this grill is not positioned under the overhang of a house, a garage or other structure before lighting it. An overhang will serve to deflect flare-ups and radiated heat into the structure itself, which could result in a fire.

Always confirm that this grill is positioned more than 24 inches (61 cm) away from any combustible materials or surface before lighting it, and that no gasoline or other volatile substances are stored in the vicinity of this grill. (See diagram to right).

The temperature of a grease fire or of the radiated heat might otherwise be sufficient to ignite nearby combustible or volatile substances.

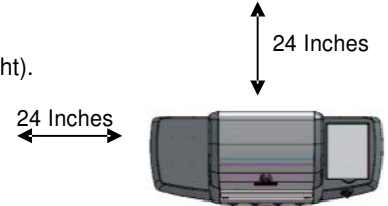

Always locate this grill where there will be ample combustion and ventilation air, but

never position it in the direct path of a strong wind.

Never allow the grill to operate while unattended, to prevent uncontrolled grease fires from erupting.

Never attempt to move this grill while it is in operation or while it is still hot, to prevent possible personal injury.

Never store or use gasoline or other flammable or volatile substances in the vicinity of this grill or in the vicinity of any other heating-generating appliance, because of the danger of starting a fire.

Always confirm that the installation of this grill conforms with the requirements of all local codes or, in the absence of applicable local codes, with either the National Fuel Gas Code, ANSI Z223. NFPA 54 or CAN/CGA-B149.2.

DANGER – Gas Safety

Natural gas is flammable and hazardous if handled improperly. Become aware of its characteristics before using any natural gas product.

- Natural gas characteristics: Flammable, explosive under pressure, lighter than air and settles in pools in high areas.
- In its natural state, natural gas has no odor. For your safety, an odorant has been added.
- This grill is shipped from the factory for natural gas use only.

CAUTION

- It is essential to keep the grill's valve compartment, burners and circulating air passages clean.
- Inspect the grill before each use.

Step 1. Inspect all hoses and connections and make certain they are secure.


Step 2. Check and clean the burner venturi tubes for insects and insect nests by removing the burner and inserting a bottle brush cleaner into each tube to make sure the passage is clear.

*** A clogged tube can lead to a fire beneath the grill. ***















Step 3. Ensure that the valve nozzle is pointing straight and completely inserted into the venturi tube.

GENERAL INFORMATION










1. A natural gas hose is required for operation.
2. This gas grill is NOT intended for commercial use.



Illustrated Parts List

<p>1. Left side panel..... 1pc</p> 	<p>2. Right side panel 1pc</p> 	<p>3. Bottom panel assembly ... 1pc</p> 	<p>4. Back panel..... 1pc</p> 
<p>5. Front top beam..... 1pc</p> 	<p>6. Main doors..... 2pcs</p> 	<p>7. Heat insulation plate..... 1pc</p> 	<p>8. Grill body assembly..... 1pc</p> 
<p>9. Left side shelf..... 1pc</p> 	<p>10. Right side shelf 1pc</p> 	<p>11. Side burner assembly.... 1pc</p> 	<p>12. Heat plate..... 4pc</p> 
<p>13. Cooking grate..... 2pcs</p> 	<p>14. Warming grate-body..... 1pc</p> 	<p>15. Warming grate-lid..... 1pc</p> 	<p>16. Cup support..... 1pc</p> 
<p>17. Grease cup..... 1pc</p> 	<p>18. Storage basket..... 1pc</p> 	<p>19. Side burner knob..... 1pc</p> 	<p>20. Knob seat..... 3pcs</p> 

Hardware List


A	 M6x15mm Bolt	6cs	F	 M4x12 mm Bolt	6pcs
B	 M6x20mm Bolt	4pcs	G	 Small	6pcs
C	 M6x45mm Bolt	4pcs	H	 M4 Nut	4pcs
D	 Spring Washer	10pcs	I	 Screwdriver	1pc
E	 Large Washer	14pcs			

**Hardware listed above is not scaled to exact size.
 (A screwdriver is required on assembly and is included for your convenience).**

Assembly Instructions

Remove all contents from the carton packaging. Make sure all parts are present before attempting assembly. Once the grill is fully assembled, go back and check to make certain all the bolts are tighten. Tighten again using the screwdriver provided if necessary.

Estimated Assembly Time: 50 minutes.

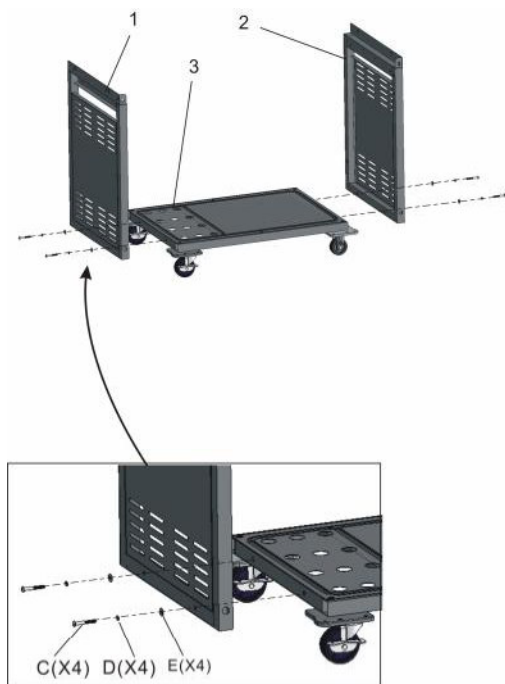


Step 1


Note: Before beginning assembly, make certain the two swivel casters on the bottom panel assembly are locked.

- Align the holes on the bottom of the left side panel (1) with the holes on the left side of the bottom panel assembly (3).
- Insert one M6x45mm bolt (C), one spring washer (D) and one larger washer (E) into each pre-drilled hole.
- Tighten by hand until secure.
- Repeat the procedure for the right side panel (2).
- Go back to tighten all the bolts using the screwdriver provided.

Step 2

- Loosen four back panel bolts (pre-attached).
- Insert the back panel (4) and push down it until the back panel locks into place.
- Tighten by hand until secure.
- Go back to tighten all the bolts using the screwdriver provided.

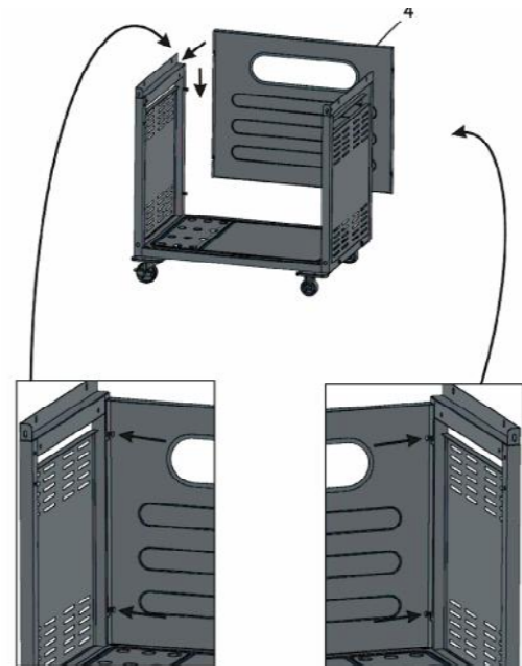


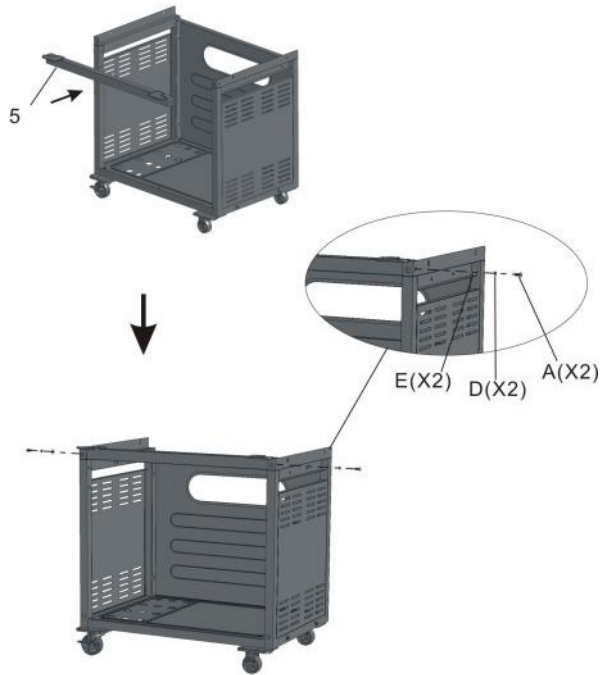



Step 3

- Place the front top beam (5) in front of the cart assembly.
- Align the holes on the left inside of the cart assembly with holes on the front top beam.
- Insert one M6 bolt (A), one spring washer (D) and one larger washer (E) into each hole.
- Tighten by hand until secure.
- Repeat the procedure for right inside of the cart assembly.
- Go back to tighten all the bolts using the screwdriver provided.

Step 4

- Slide the storage basket (18) onto the slots on the right door (6-1).
- Insert the pin on the bottom of the left door (6-1) into the hole on the left bottom side of the cart assembly.
- Push down the pin on top of the left door (6-1) and insert into the hole on the left side of the cart front beam.
- Repeat the same procedure for the right door (6-2).

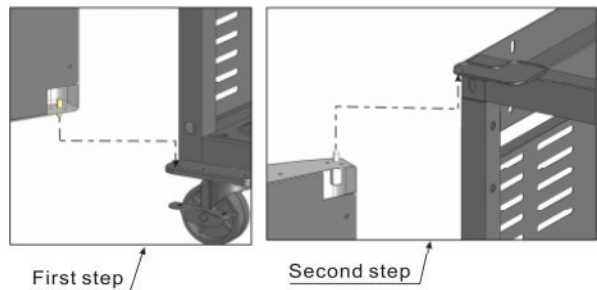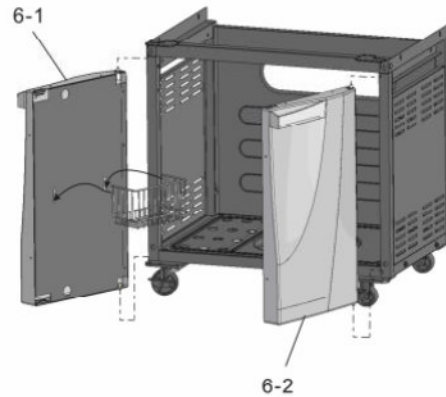


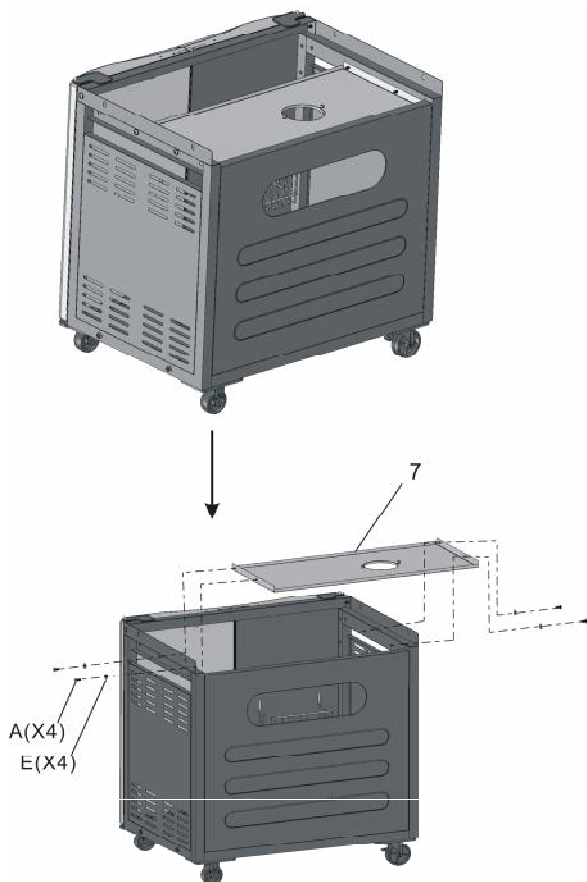



Step 5

- Slide the heat insulation plate (7) into the back of the cart assembly.
- Align the hole on the cart with pre-drilled holes on gas insulation plate.
- Screw one M6 bolt (A) and one large washer (E) into each pre-drilled holes.
- Tighten all the bolts using the screwdriver provided.

Step 6

- Place the body assembly (8) on top of the cart assembly.
Note: Make certain the pre-drilled holes on the left side of the body assembly are properly aligned.
- Insert one M6 bolt (B), one spring washer (D) and one large washer (E) into each hole on right side of the body assembly.
- Tighten the bolt by hand until secured.
- Repeat the procedure for the left side of the body assembly.
- Go back to tighten all the bolts using the screwdriver provided.

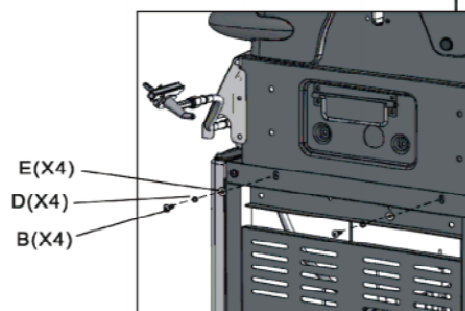

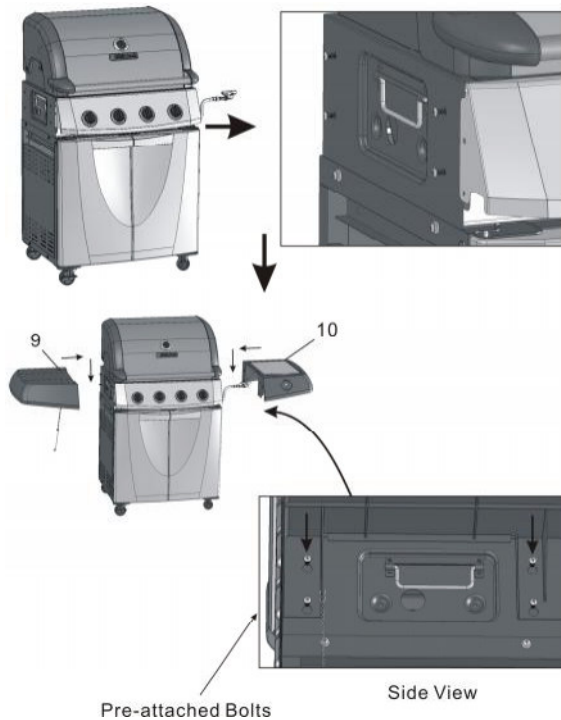


Step 7

- a) Loosen the four side panel bolts (pre-attached) on the right side of the body assembly and allow 1/4 of the bolt's length to extend from the body assembly.
- b) Align the large holes of the left side shelf (9) with the bolts extended from the body assembly.
- c) Push down the left side shelf until the shelf locks into place.
- d) Tighten bolt connections by hand until secure.
- e) Repeat the same procedure for the right side shelf (10).
- f) Go back to tighten all the bolts using the screwdriver provided.





Step 8

- a) Align the holes on side knob seat (20) with the holes on the right side shelf and side burner valve.
- b) Screw one M4x16mm bolt (F) and one small washer (G) into each pre-drilled hole.
- c) Tighten the bolts using the screwdriver provided. d) Insert the side burner knob (19) into knob shaft of valve.

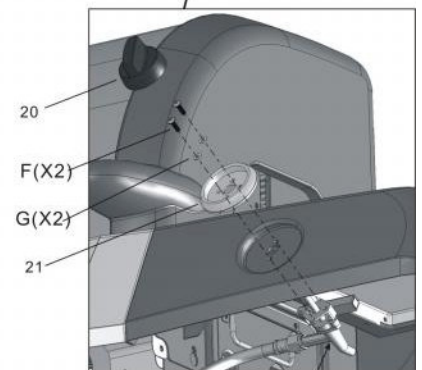

Side Burner Valve

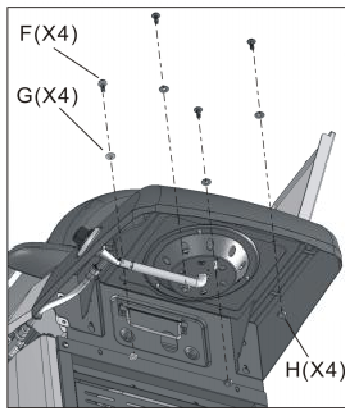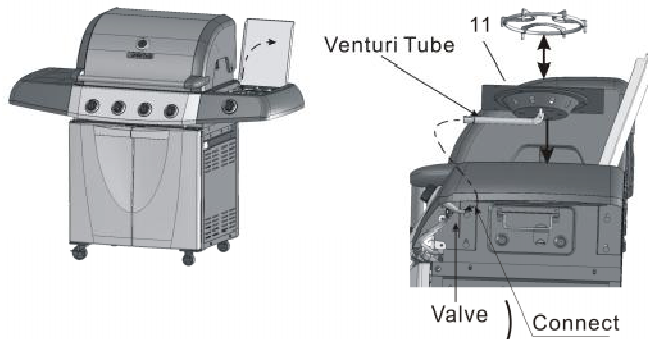

Bottom View


Step 9


- a) Open the side burner lid and place the side burner assembly (11) on the right side shelf. Make certain the venturi tube is connected properly with valve.
- b) Align the holes on the side burner assembly with the holes on the right side shelf.
- c) Insert one M4 bolts (F) into each hole on side burner assembly and insert one small washer (G) and one M4 nut (H) from bottom side into each bolt and tighten by hand.
- d) Go back to tighten all the bolts using screwdriver provided.



Step 10


- a) Connect the ignition cable with the electrode by insert the connector of the ignition cable to electrode pin.
- b) Make certain the connection is secured.

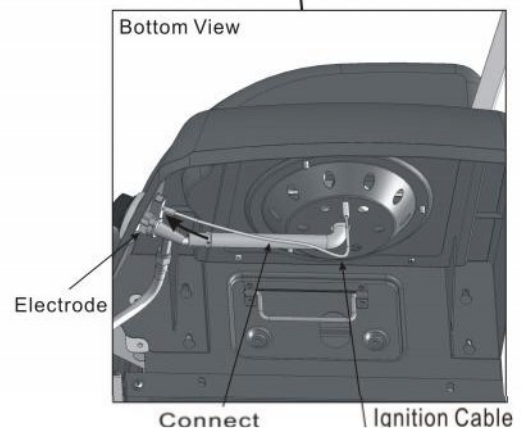

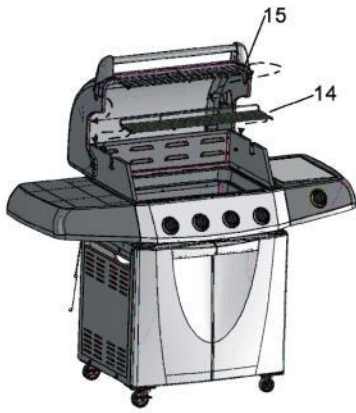


Step 11


- a) Place the four heat plates (12) inside the grill upon the burners.
- b) Place the two cooking gates (13) inside the grill upon the heating shields.
- c) Insert the four feet of the warming grates-body (14) into the holes on top of grill body.
- d) Insert two ends of side warming grates-lid (15) into the holes on inside of the top lid.

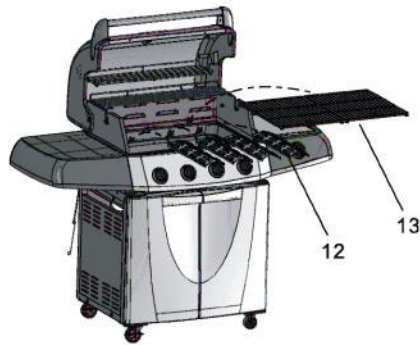

Step 12

- a) Hook the cup support (16) into the grooves under the heat insulating plate.
- b) Place the grease cup (17) on the cup support.

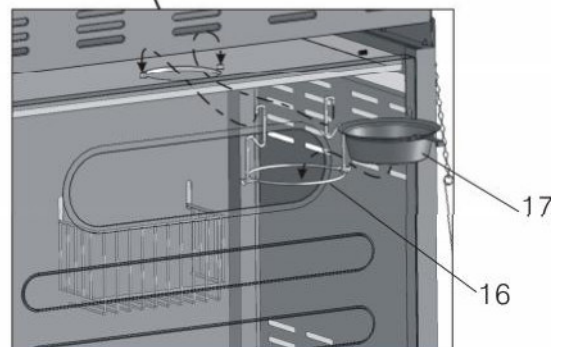


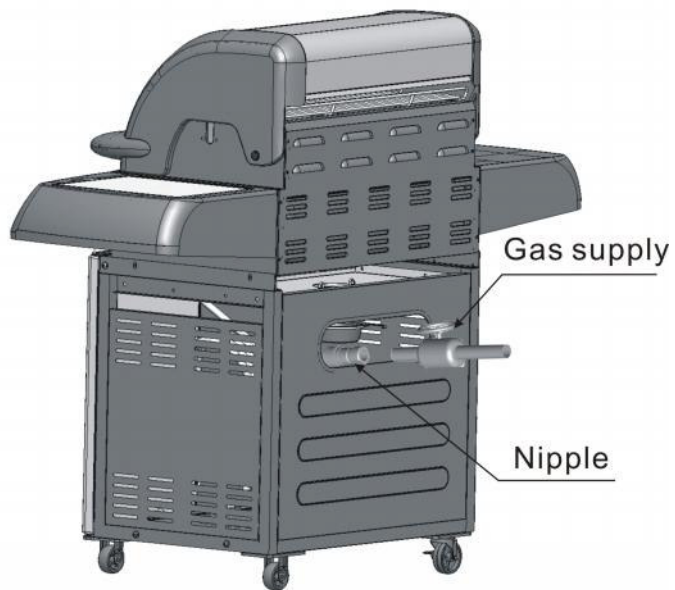

Step 13

- a) Connect the natural gas hose with the side burner valve by screwing the nut on end of the hose

Fully Assembled View

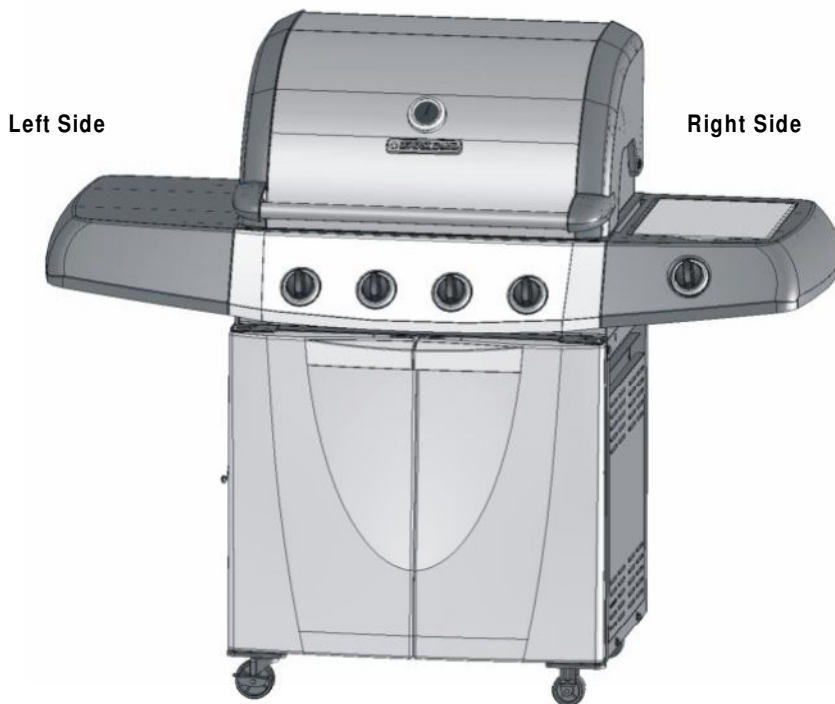

Operating Your Grill

Your natural gas grill has been designed to operate on natural gas only, at a pressure of seven inches water column (7" W.C.). Check with your gas utility for local gas pressure, because in some areas natural gas pressure varies. Also, check with your gas company or with local building codes for instructions to install gas supply line or call a licensed and qualified installer.

It is recommended that an ON/OFF manual shut-off valve be installed at the gas supply source outdoors after the gas line exits outside wall and before release quick disconnect or before gas supply line enters ground.


Pipe sealing compound or pipe thread tape of the type resistant to the action of natural gas must be used on all male pipe threads. Apply compound or tape to at least the first three to four threads when making connections.

Never store or use gasoline or other volatile substance in the vicinity of this grill.

Natural Gas Connection

Connect a manual shutoff valve to gas supply line. Apply sealing compound or pipe thread tape of the type resistant to the action of natural gas on all male pipe threads. Attach to side burner valve. Connect the other end, with the quick release connector, of the natural gas hose to manual shut-off valve.

NATURAL GAS HOSE ASSEMBLY

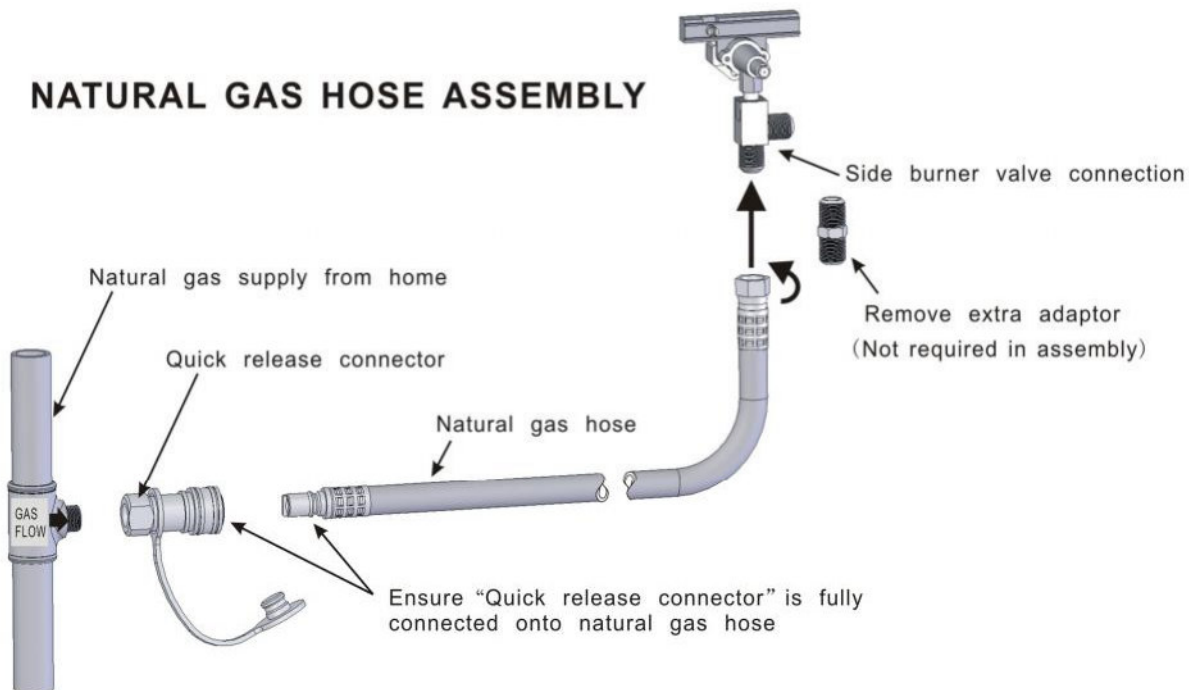

! Caution:

During any high pressure testing of the gas supply piping system at test pressures in excess of 1/2 psi (3.5 kPa), Your gas grill and its individual shutoff valve must be disconnected from the gas supply piping system.

The outdoor cooking gas appliance must be isolated from the gas supply piping system by closing its individual manual shutoff valve during any pressure testing of the gas supply piping system at least equal to or less than 1/2 psi (3.5 kPa).

! Warning:

Burner valves are pre-tested at the factory to operate on natural gas. Do not attempt to convert or change.

! DANGER

To prevent fire or explosion hazard when testing for a leak:

1. Always perform the "leak test" on page 17 before lighting the grill and each time the natural gas hose is connected for use.
2. Do not smoke or allow other sources of ignition in the area while conducting a leak test.
3. Conduct the leak test outdoors in a well-ventilated area.
4. Do not use matches, lighters or a flame to check for leaks.
5. Do not use grill until all leaks have been stopped. If you are unable to stop a leak, disconnect the natural supply supply, call for gas appliance service or your local natural gas supplier.

Checking for Leaks

1. Make 2-3 oz. of leak solution by mixing one part liquid dishwashing soap with three parts water.
2. Make sure control knobs are in the "OFF" position.
3. Spray some solution on the connection point of natural gas hose.
4. Open natural gas valve at natural gas supply from home.
5. Inspect the solution at the connections for bubbles. If no bubbles appear, the connection and hose are secure.
6. If bubbles appear on the hose, contact the customer service center and get a replacement.
7. If bubbles appear at a connection point, disconnect and reconnect, making sure the connection is secure.
8. Retest with solution.
9. If you continue to see bubbles, contact the customer service center.

Lighting Your Grill

! Danger: Failure to open lid while igniting the grill's burners or not waiting 5 minutes to allow gas to clear if the grill does not light, may result in an explosion, which could cause serious bodily injury or death.

! WARNING: Never stand with your head directly over the grill when preparing to light the main burners, to prevent possible bodily injury.

Main Burner


1. Open lid while lighting burners.

! WARNING: Attempting to light the burner with the lid closed may cause an explosion. Make sure there are no obstructions of airflow to the gas unit. Spiders and insects can nest and clog the burner/venturi tube at the orifice. A clogged burner tube can lead to a fire beneath the appliance.

2. All valves must be in the "OFF" position.
3. Open cylinder valve.
4. Ignite only the burners you wish to use, using the same method for each:
Push desired burner valve knob and rotate slowly about 1/4 counter-clockwise until a click is heard. The burner should light. If the burner does not light, return the valve knob to the "OFF" position immediately. Wait five minutes for the gas to clear and repeat the procedure. After burner is lit, repeat the procedure with any other burner desired
5. Adjust valve knob(s) to desired cooking temperature

Using the Lighting Stick to Light the Main Burners

1. Insert a match into the end of lighting stick. Light the match.
2. Once lit, place the flame through the hole on grill body to reach the burner ports.
(See diagram to right).
3. Press the valve knob and rotate it counter clockwise to the "HIGH" position. The burner should light immediately. If more than one burner is desired, repeat the same procedure for the adjacent burner and continue in sequence until all desired burners are lit.
4. Adjust burners to the desired cooking temperature.



Burner installation and adjustment

Precautions

1. After lighting, observe the burner flame. Make sure all burner ports are lit.
2. If the burner flame goes out during operation, immediately turn the gas "OFF". Open lid to let the gas clear for at least 5 minutes before re-lighting.
3. Before cooking on the grill for the first time, operate the grill for approximately 15 minutes with the lid closed and the gas turned on "HIGH". This will "heat clean" the internal parts, dissipate odor from the manufacturing process and painted finish.
4. Clean the grill after each use. DO NOT use abrasive or flammable cleaners. This may damage parts of the grill and cause a fire.

Side Burner

1. Open lid while lighting the burner. Lid must remain open while burner is lit.
2. Valve must be in the "OFF" position.
3. Open natural gas supply valve.
4. Push side burner knob fully and rotate it slowly about 1/4 turn counter-clockwise, then press the igniter promptly. The burner should light. If the burner does not light, turn the knob to the "OFF" position immediately. Wait five minutes for the gas to clear and repeat the procedure.
5. Adjust valve knob to the desired cooking temperature.

Using the Lighting Stick to Light the Side Burner


1. Open the side top lid. Lid must remain open while burner is lit.
2. Stick out the lighting stick then insert a match into the end of lighting stick.
3. Light the match.
4. Once lit, place the flame through the hole on grill body to reach the burner ports. (See diagram to right).
5. Press the control knob and rotate it counter clockwise to the "HIGH" position. The burner should light immediately.



**Observe flame height when lit:
Flame should be a blue/yellow color between 1 to 2 inches high.**


Confirm that the burner is properly lit and that the flame pattern is as desired (see fig. A,B and C below for the proper flame patterns). If the flame pattern is other than normal, consult the troubleshooting guide on page 22 for corrective action.

FIG. A




Normal: Soft blue flames with yellow tips between 1 inch - 2 inches high.

FIG. B




Out of adjustment: Noisy hard blue flames – too much air.

FIG. C




Poor combustion: Wavy, yellow flames- too little air.


Burner installation and adjustment

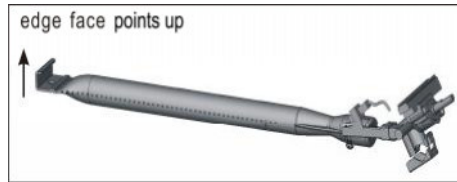

1. End edge face upside for install the burner



1. Release the screw on venturi tube.
2. Adjust the flame by turning the collar on head of venturi tube.
3. Tighten the screw and make certain it is secured.



1. Overlap 20 mm between venturi tube and nozzle when assembly.
2. Keep the center line of venturi tube and nozzle on one line.

Flare-ups

“Flare-ups” sometimes occur when food drippings fall onto the hot heat distribution plate or burners and ignite. Some flaring is normal and desirable, as it helps impart the unique flavors associated with grilled foods. Controlling the intensity of the flare-ups is necessary, however, in order to avoid burned or unevenly cooked foods and to prevent the possibility of accidental fire.

! WARNING: Always monitor the grill closely when cooking and turn the flame level down to LOW or OFF, if flare-ups intensify.

Shutting Off Burners

1. Always turn the valve knob(s) clockwise to the “HIGH” position, then press and turn it to “OFF”. Never force the knob without pressing it. This could damage the valve.
2. Promptly turn the natural gas supply to OFF.
3. Close the lid of the grill.

Excess flow safety valve reset procedure

- Unsafe practices of grill operation could activate the safety device without having a gas leak.
- A sudden shut off of the gas flow typically occurs if you open the natural gas supply valve rapidly, or if one or more of the burner control knobs is in an open position when opening the natural gas supply valve.
- To ensure the procedure is safely and successfully performed, please carefully follow the instructions as:
 1. Close the natural gas supply valve.
 2. Turn all burner control knobs to the OFF position.
 3. Disconnect the natural gas hose.
 4. Open the lid of the grill.
 5. Turn burner control knobs to HIGH.
 6. Wait at least 1 minute.
 7. Turn burner control knobs OFF.
 8. Wait for at least 5 minutes.
 9. Re-connect the natural gas hose.
 10. Slowly turn the natural gas valve ¼ turn at a time and have the valve all the way open.
 11. With the lid open: for grill with ignition button: ONLY turn on ONE front burner control knob to the HIGH position. Ignite the grill by pushing the ignition button. For grill with an automatic ignition: Push down the control knob you want to light, turn counter clock wise until you hear the ignition click.
 12. After the first front burner is lit, turn on the other control knob(s) to the HIGH position. **If you have more than two burners, ONLY turn them on ONE AT A TIME.
 13. When all front burners are lit, close the grill lid.
 14. Wait for 10-15 minutes, the temperature should reach 400 – 450 F°

Care and Maintenance

IMPORTANT

Always allow to completely cool off before covering your grill to prevent corrosion from condensation.

Caution: All cleaning and maintenance should be done when the grill is cool, with the fuel supply turned off at the control dial and the natural gas hose disconnected. DO NOT clean any grill part in a self-cleaning oven. The extreme heat will damage the finish.

Cleaning

Burning off the grill after every use (approx. 15 minutes) will keep excessive food residue from building up.

Recommended cleaning materials -

Mild dishwashing liquid detergent	Hot water
Nylon cleaning pad	Wire brush
Paper clip	Putty knife/scrapper
Compressed air	

DO NOT use cleaners that contain acid, mineral spirits or xylene.

Outside surfaces

Use a mild dishwashing detergent and hot water solution to clean. Rinse thoroughly with water.

Inside surface

If the inside surface of the grill lid has the appearance of peeling paint, baked on grease has turned to carbon and is flaking off. Clean thoroughly with a strong solution of detergent and hot water. Rinse with water and allow it to completely dry.

Interior of grill bottom – Remove residue using brush, scraper and/or cleaning pad. Wash with a dishwashing detergent and hot water solution. Rinse with water and let dry.

Cooking Grates – The porcelain grates have a glass-like composition that should be handled with care. Use a mild dishwashing detergent or baking soda and hot water solution. Non-abrasive scouring powder can be used on stubborn stains. Rinse with water.

Heat Plates – Clean residue with wire brush and wash with soapy water. Rinse with water.

Grease Cup – Periodically empty the grease cup and clean with a dishwashing detergent and hot water solution.

Cleaning the Burner Assembly

1. Turn gas off at the control knobs and natural gas supply valve.
2. Remove cooking grates and heat plate.
3. Remove grease cup.
4. Remove burner by unscrewing nut from beneath burner “foot” using a screwdriver and pliers.
5. Lift burner up and away from the gas valve orifice.
6. Clean inlet (venturi tube) of burner with small bottle brush or compressed air.
7. Remove all food residue and dirt on outside of burner surface.
8. Clean any clogged ports with a stiff wire (such as an opened paper clip).
9. Inspect burner for damage (cracks or holes). If damage is found, replace with a new burner. Reinstall burner. Make certain the gas valve orifices are correctly positioned, pointing straight into burner inlet (venturi tube). Also, check position of spark electrode.

Award-Winning Barbecue Recipes

Never-fail Barbecue Sauce

Ingredients:

¼ cup	Finely chopped onion
2 tablespoons	Butter or margarine
¼ cup	Brown sugar, firmly packed
1 tablespoon	Worcestershire sauce
¼ teaspoon	Hot sauce
1	Garlic clove, finely chopped
1 cup	Catsup
¼ cup	Lemon juice
1 teaspoon	Prepared mustard

Prepare:

Cook onion and garlic in margarine until tender. Add remaining ingredients and bring to a boil. Simmer uncovered 15 to 20 minutes. Refrigerate leftovers after use.

Mamma's Marinated Chicken

Ingredients:

¼ cup	Dijon mustard
2 tablespoons	Fresh lemon juice
1 ½ teaspoons	Worcestershire sauce
½ teaspoon	Dried tarragon
¼ teaspoon	Freshly ground black pepper
4	Boneless, skinless chicken breast halve

Prepare:

Combine ingredients, mixing well. Marinate chicken for several hours. Grill uncovered, over medium heat, for 10 to 15 minutes. Chicken is done when juices run clear.

Barbecued Honey Steak

Ingredients:

5 pounds	Beef sirloin steak
2 tablespoons	Red pepper -- crushed
1 teaspoon	Black pepper
2	Garlic cloves -- crushed
1 large	Onion
1 cup	Honey

Prepare:

Combine all ingredients and marinate steak for 7-8 hours. Remove meat from marinade and grill over very high heat to desired doneness. Heat leftover marinade to a boil and pour over grilled steak to serve.

Hardcore Grilled Trout

Ingredients:

¼ cup	Lemon or lime juice
2 tablespoons	Melted butter
2 tablespoons	Vegetable oil
2 tablespoons	Chopped parsley
1 tablespoon	Hot sauce
½ teaspoon	Ground ginger
½ teaspoon	Salt
4 brook trout -- about 1 pound each	

Prepare:

Combine lemon juice, margarine, oil, parsley, hot sauce, ginger and salt. Mix well. Pierce skin of fish in several places. Roll fish in juice mixture to coat inside and out. Cover and refrigerate 30 minutes to 1 hour, turning occasionally. Remove fish from marinade. Place fish on grill; brush fish with marinade while grilling. Cook over high heat for 5 minutes. Turn and brush with marinade. Cook 5 minutes longer. Fish is done when it flakes easily with fork.

Grilled Veggies

Ingredients:

¾ cup	Olive oil
¼ cup	Red wine vinegar
1 teaspoon	Fresh rosemary
1 teaspoon	Fresh thyme leaves
1 teaspoon	Fresh basil, chopped
1 teaspoon	Fresh oregano, chopped
1 tablespoon	Minced garlic
½ teaspoon	Salt
½ teaspoon	Ground black pepper
2 pounds assorted vegetables, chopped or whole according to taste.	

Prepare

Combine all ingredients in a small bowl. Marinate vegetables with sauce. Cover and refrigerate for 2 hrs. Grill vegetables over medium heat until tender, brushing them with marinade while they cook. Cooking times will vary according to the vegetables chosen.

Troubleshooting

Problem	Possible Cause	Prevention/Cure
Burner will not light using knobs or igniter.	Wires/or electrode covered with cooking residue.	Clean wire and /or electrode with rubbing alcohol.
	Electrode and burners are wet.	Wipe dry with cloth.
	Electrode cracked or broken – sparks at crack.	Replace electrode.
	Wire loose or disconnected.	Reconnect wire or replace electrode/wire assembly.
Burner will not light using a match.	No gas flow.	Check if natural gas supply is stopped. If it is not stopped, refer to Excessive flow safety valve reset procedure on page 17.
	Coupling nut and regulator not fully connected.	Turn the coupling nut about one-half to three quarters additional turn until solid stop. Tighten by hand ONLY - do not use tools.
	Obstruction of gas flow.	Clear burner tubes. Check for bent or kinked hose.
	Disengagement of burner to valve.	Reengage burner and valve.
	Spider webs or insect nest in venturi.	Clean venturi.
	Burner ports clogged or blocked.	Clean burner ports.
Sudden drop in gas flow or reduced flame height.	Out of gas.	Call your local gas company.
	Excess flow safety device may have been activated.	Refer to the Excessive flow safety valve reset procedure on page 17.
Irregular flame pattern, flame does not run the full length of burner.	Burner ports are clogged or blocked.	Clean burner ports.
Flame is yellow or orange.	New burner may have residual manufacturing oils.	Burn grill for 15 minutes with the lid closed.
	Spider webs or insect nest in venturi.	Clean venturi.
	Food residue, grease or seasoning salt on burner.	Clean burner.
	Poor alignment of valve to burner venturi.	Assure burner venturi is properly engaged with valve.

Flame blew out.	High or gusting winds.	Turn front of grill to face wind or increase flame height.
	Low on natural gas.	Call your local gas company.
	Excess flow valve tripped.	Refer to the Excessive flow safety valve reset procedure on page 17.
Flare-up.	Grease buildup.	Clean grill.
	Excessive fat in meat.	Trim fat from meat before grilling.
	Excessive cooking temperature.	Adjust (lower) temperature accordingly.
Persistent grease fire.	Grease trapped by food buildup around burner system.	Turn knobs to OFF. Turn gas OFF at gas supply valve at the source. Leave lid in closed position and let fire burn out. After grill cools, remove and clean all parts.
Flashback [fire in burner tubes].	Burner and /or burner tubes are locked.	Clean burner and/or burner tube(s).
Inside of lid is peeling – like pant peeling.	The lid is stainless steel, not painted.	Baked on grease buildup has turned to carbon and is flaking off. Clean thoroughly.
Irregular flame.	Air flow is not correct. <u>Correct</u> Flame blue with yellow tips, 1-2" high. <u>Too little air</u> : wavy yellow or orange flames. <u>Too much air</u> : noisy blue flames.	If flames are yellow or orange – open flap at the end of the venturi tubes in 1/8" increments until flames are correct. If flames are blue and noisy – close flap at the end of the venturi tubes in 1/8" increments until flames are correct. *Natural Gas Models must be open a minimum of 1/16".

Warranty Program

Proof of purchase is required to access this warranty program, which is in effect from the date of purchase. Inability to provide proof of purchase or after the warranty has expired, customers will be subject to parts, shipping and handling fees.

Full 30-Day Warranty

Any missing parts can be replaced at no charge within 30 days from the date of purchase, with a valid proof of purchase.

Limited Warranty

1 Year Warranty on all parts in regards to damage affecting the operation of the gas grill.

Warranty Provisions:

- This warranty is non-transferable and does not cover failures due to misuse or improper installation or maintenance.
- This warranty is for replacement of defective parts only. We are not responsible for incidental or consequential damages or labor costs.
- This warranty does not cover chips and scratches of porcelain or painted surfaces, nor does it cover corrosion or discoloration due to misuse, lack of maintenance, hostile environment, accidents, alterations, abuse or neglect.
- This warranty does not cover damage caused by heat, abrasive and chemical cleaners, resulting in chipped porcelain enamel parts or any damage to other components used in the installation or operation of the gas grill.

Inability to provide proof of purchase or after the warranty has expired, customers will be subject to parts, shipping and handling fees.

Some state do not allow the limitation or exclusion of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights that vary from state to state.

If you have any questions related to the product or warranty, please visit our website at www.bbqtek.com or email us to service@bbqtek.com or call our customer service center at 1-888-571-6888, 6:00 A.M. to 5:00 P.M. (PST), Monday through Friday.

Distributed by:

**LG Sourcing Inc.
P.O. Box 1535
North Wilkesboro
NC 28659, USA**